



Sail Measurement Form

Mainsail

Fill in and send to cotes@sailonet.com

Order N° : _____ Date : _____

☐ Standard (classic 4 battens) ☐ Fully battened (fullbatten)

Cut : ☐ Cross Cut ☐ Dacron ☐ Flex (option)

☐ Radial Cut (Laminate) DCX : ☐ White ☐ Grey

☐ Radial Cut Pro Radial White

Options : ☐ Floppy rings ☐ Rollsliders

Yacht : _____ Compulsory

Marina : _____ Dock : _____

Surname : _____ First name : _____

Phone : _____

Mainsail : ☐ bolt rope ☐ luff slides ☐ mizzen ☐ external track

Reef number: ☐ 0 ☐ 1 ☐ 2 ☐ 3

Automatic reefs : ☐ No ☐ Yes If yes, please fill in details below

Sailing programm : ☐ Inshore cruising ☐ Racing Offshore

☐ Cruising/racing ☐ cruising

Aluminium profil details

opening mm bolt rope diameter mm

diameter mm depth mm luff slide reference

opening mm luff slide reference

thickness mm width mm depth mm

Measurements taken:

- ☐ At the end (clew point) of your old sail, when up.
- ☐ To the clew shackle with outhaul fully tight
- ☐ To the black band


Measure on the backstay along the boom

Tack shackle

Are the mesures has been taken with the tack shackle in position ?

yes ☐ no ☐

To estimate the measurement there is no need to climb into the mast. You just need hoist the mainhalyard with a tape measure plus a drop line fixed at it's end...

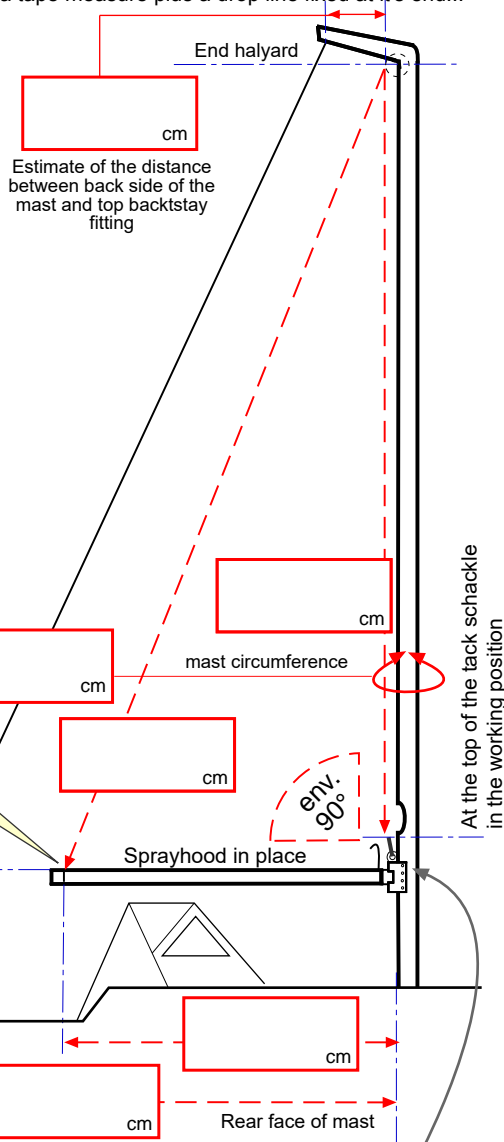

Mast details (if existing)

Trade mark : _____

Mast code : _____

Track details (if existing)

Trade mark : _____

Mast code : _____

Axe filetée de connexion au boitier M10 ☐ M12 ☐

Automatic reefing info

Boommark

Auto-reef for : ☐ 1 ☐ 1 & 2 ☐ 1 & 2 & 3

☐ 1 ☐ port ☐ Block with lashing ☐ starboard ☐ Lashing to fix block


☐ 2 ☐ port ☐ Block with lashing ☐ starboard ☐ Lashing to fix block

☐ 3 ☐ port ☐ Block with lashing ☐ starboard ☐ Lashing to fix block

Comments :

Do you have a sprayhood ? ☐ yes ☐ no

Clew strap



To use the standard clew strap you need to have appr 20 - 30 cm of free space under the boom in front of the sail or the black mark. Is that the case?

☐ yes ☐ no

Otherwise please provide the diametre of your boom slider.

Tack point details

Distance between backside of the mast and tackshackle or fix point tack of the mainsail

mm

Distance between backside of the mast and reef hook or fix point reef mm

Top of mast groove entry cm

cm

Boom circumference cm